

NORX WINDLOAD TEST REPORT

SCOPE OF WORK

ASTM D5206 WINDLOAD TESTING PER ICC-ES AC524 SECTION 3.8 ON LONDON COLLECTION,
VERTICAL CLADDING

REPORT NUMBER

P0941.03-109-40

TEST DATES

12/27/23 - 12/28/23

ISSUE DATE

02/12/24

RECORD RETENTION END DATE


12/28/27

PAGES

8

DOCUMENT CONTROL NUMBER

ATI 00500 (01/18/24)
RT-R-AMER-Test-2808
© 2017 INTERTEK

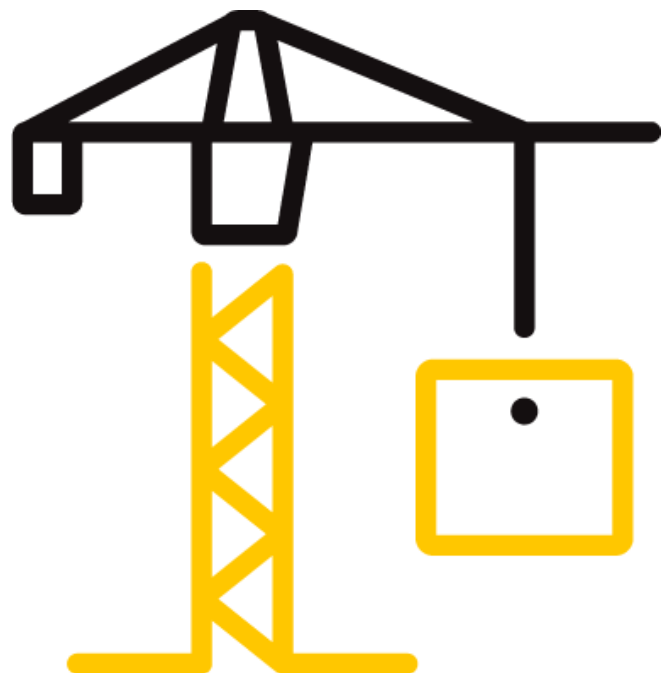

TEST REPORT FOR NORX

Report No.: P0941.03-109-40

Date: 02/12/24

REPORT ISSUED TO

NORX

20807 Biscayne Blvd. Unit 304

Aventura, Florida 33180

SECTION 1

SCOPE

Architectural Testing, Inc. (an Intertek company) dba Intertek Building & Construction (B&C) was contracted by Norx to perform windload testing in accordance with ASTM D5206 per ICC-ES AC524 Section 3.8 on their London Collection, vertical cladding. Results obtained are tested values and were secured by using the designated test method(s). Testing was conducted at Intertek B&C test facility in York, Pennsylvania.

This report does not constitute certification of this product nor an opinion or endorsement by this laboratory. Intertek B&C will service this report for the entire test record retention period. The test record retention period ends four years after the test date. Test records, such as detailed drawings, datasheets, representative samples of test specimens, or other pertinent project documentation, will be retained for the entire test record retention period.

Unless differently required, Intertek reports apply the "Simple Acceptance" rule, also called "Shared Risk Approach," of ILAC-G8:09/2019, Guidelines on Decision Rules and Statements of Conformity.

For INTERTEK B&C:

COMPLETED BY:	Austin G. Beck
TITLE:	Technician – Product Testing
SIGNATURE:	
DATE:	02/12/24

REVIEWED BY:	Ken R. Stough
TITLE:	Project Manager – Product Testing
SIGNATURE:	
DATE:	02/12/24

AGB:mas

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample(s) tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT FOR NORX

Report No.: P0941.03-109-40

Date: 02/12/24

SECTION 2

TEST METHODS

The specimens were evaluated in accordance with the following:

ASTM D5206-19, *Standard Test Method for Windload Resistance of Rigid Plastic Siding*

ICC-ES AC524 Section 3.8, *Acceptance Criteria for Wood-Plastic Composite Products used as Exterior Siding*

SECTION 3

MATERIAL SOURCE/INSTALLATION

The specimen(s) were selected by Intertek B&C personnel. The specimen(s) was/were witnessed during production and tagged prior to shipment on 02/13/23 - 02/14/23, (Reference Intertek B&C Test Specimen Selection Report No. P0941.01-119-19 dated 02/13/23 - 02/14/23).

The specimen was installed into test buck measuring 8' wide by 4' 1-1/4" high constructed of #2 Spruce-Pine-Fir nominal 2x4 lumber. Five studs were spaced 16" on center (six spans) and were attached to the top and bottom plates with 3" long drywall screws. A sheet of nominal 7/16" thick OSB, with five 4" diameter holes to allow pressure to transfer to the siding, was secured to the studs with #8 x 1-5/8" drywall screws. Spruce-Pine-Fir furring strips measuring 1-1/2" x 1-1/2" were secured to the wall horizontally, 16" on center (three spans) with 3" long drywall screws. Silicone was utilized on the backside of the test panel to seal the perimeter. A 2-mil thick plastic film was loosely draped over the interior and exterior of the siding to enable attainment of negative and positive pressure.

The first course of cladding was mounted to the furring strips with a 1" wide, 1/16" thick U-shaped starter clip (CLAD-SSS13). A 5/32" drill bit was used to pre drill holes 16" on center to allow 1/8" diameter, 7/32" head, 1-1/2" long trim screws (CLAD-SSC1) to fasten the cladding to the furring strips.

SECTION 4

EQUIPMENT

Tape measure: 63788

Control Panel: 003921

Weather Station: 63316

TEST REPORT FOR NORX

Report No.: P0941.03-109-40

Date: 02/12/24

SECTION 5

LIST OF OFFICIAL OBSERVERS

NAME	COMPANY
Jason R. Zeller	Intertek B&C
Ken R. Stough	Intertek B&C
Austin G. Beck	Intertek B&C

SECTION 6

TEST SPECIMEN DESCRIPTION

MANUFACTURER	Norx
SERIES/MODEL	London Collection
PRODUCT TYPE	Vertical cladding
MATERIAL TYPE	Composite
NOMINAL THICKNESS	0.165"
MEASURED THICKNESS	0.170"
NAIL HEM TYPE	Single
NAIL HEM THICKNESS	0.165"
NAIL SLOT EDGE DISTANCE	0.300"
EXTERIOR FINISH	Wood grain finish

Each specimen consisted of five vertical courses of siding with a female interlock on the right edge and a male interlock on the left edge.

SECTION 7

TEST RESULTS

The temperature during testing was 18-20°C (64-68°F). The results are tabulated as follows:

General Note: All loads were negative pressure and were held for thirty seconds. A 5.0 psf pre-load was applied before running specimens to failure.

Test Specimen #1:

PRESSURE	RESULTS
10.0 psf to 120.0 psf	No damage
123.0 psf	Nail hem over-rode the installation fasteners at the 3rd course.

TEST REPORT FOR NORX

Report No.: P0941.03-109-40

Date: 02/12/24

Test Specimen #2:

PRESSURE	RESULTS
10.0 psf to 105.0 psf	No damage
106.0 psf	Nail hem over-rode the installation fasteners at the 2nd course.

Test Specimen #3:

PRESSURE	RESULTS
10.0 psf to 115.0 psf	No damage
116.0 psf	Nail hem over-rode the installation fasteners at the 5th course.

General Note: All loads were Positive pressure and were held for thirty seconds. A 5.0 psf pre-load was applied before running specimens to failure.

Test Specimen #4:

PRESSURE	RESULTS
10.0 psf to 150.0 psf	No damage
150.0 psf	Exceeded the buck limitations

Test Specimen #5:

PRESSURE	RESULTS
10.0 psf to 150.0 psf	No damage
150.0 psf	Exceeded the buck limitations

Test Specimen #6:

PRESSURE	RESULTS
10.0 psf to 150.0 psf	No damage
150.0 psf	Exceeded the buck limitations

SECTION 8

CONCLUSION

The specimens #1-3 tested successfully achieved an Average Maximum Sustained Negative Pressure of 113.3 psf and an Average Ultimate Negative Test Pressure of 115.0 psf.

The specimens #4-6 tested successfully achieved an Average Maximum Sustained Positive Pressure of 150.0 psf and an Average Ultimate Positive Test Pressure of 150.0 psf.

TEST REPORT FOR NORX
Report No.: P0941.03-109-40
Date: 02/12/24

SECTION 9 PHOTOGRAPHS



Photo No. 1
Test Specimen #2 London Collection, Vertical Cladding

SECTION 10 DRAWING

The test specimen drawings have been reviewed by Intertek B&C and are representative of the test specimen(s) reported herein. Test specimen construction was verified by Intertek B&C per the drawings included in this report. Any deviations are documented herein or on the drawings.




London Square

SPEC SHEET

ISOMETRIC VIEW



ACTUAL SIZE

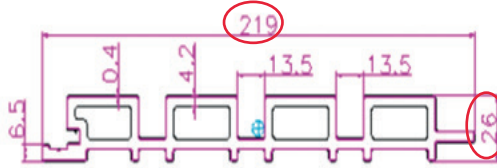

MEASURES
(mm / in)

- 219mm (≈ 8.6in)
- 28mm (≈ 1.02in)
- 13.5mm (≈ 0.53in)
- 6.5mm (≈ 0.25in)
- 4.2mm (≈ 0.16in)
- 0.4mm (≈ 0.01in)

TECHNICAL DETAILS

DENSITY	1.3g/m ³ (Standard: ASTM D792-13 Method B)
TENSILE STRENGTH	24.9 MPa (Standard: ASTM D638-14)
FLEXURAL STRENGTH	34.5Mp (Standard: ASTM D790-10)
FLEXURAL MODULUS	3510Mpa (Standard: ASTM D790-10)
IMPACT STRENGTH	88J/m (Standard: ASTM D4812-11)
SHORE HARDNESS	D70 (Standard: ASTM D2240-05)
WATER ABSORPTION	0.63% (Standard: ASTM D570-98)
THERMAL EXPANSION	33.12 x10 ⁻⁶ (Standard: ASTM D696 - 08)
SLIP RESISTANT	R11 (Standard: DIN 51130:2014)

DIMENSIONS 26mm x 219 mm x 487cm (1 in x 8 in x 16 ft)

COLOURS Hyde Park
Mayfair

	Report #: P0941.03
	Date: 2/5/24
	Verified by: <i>Quentin St. Burt</i>

INSPECTION CRITERIA

1. Visual Check

- 1.1 Type of profile
- 1.2 Surface
- 1.3 Color
- 1.4 Sanding Structure
- 1.5 Crosscut & Lengthcut
- 1.6 Core Visual

2. Dimension Check

- 2.1 Control section and length

3. Measure

- 3.1 Weight
- 3.2 Density
- 3.3 Mechanical strength



Total Quality. Assured.

130 Derry Court
York, Pennsylvania 17406

Telephone: 717-764-7700
Facsimile: 717-764-4129
www.intertek.com/building

TEST REPORT FOR NORX
Report No.: P0941.03-109-40
Date: 02/12/24

SECTION 11
REVISION LOG

REVISION #	DATE	PAGES	REVISION
0	02/12/24	N/A	Original Report Issue